



**Wünscher®**  
Germany

# CAR CARE 2024 ADDITIVES & CLEANER





## WÜNSCHER Fahrzeugteile GmbH

At Wünscher, we are dedicated to offering top-quality car care products and additives Made in Germany. Our mission is to deliver effective and innovative solutions for vehicle maintenance by providing a diverse and user-friendly range of products, all while focusing on complete customer satisfaction.

Our commitment to continuously enhancing quality and innovating in our products and services is reflected in our sustained growth over the years. The direct interaction with our competent managers simplifies the process of meeting customers' unique needs and making necessary adjustments. This customer-centric approach not only strengthens our position on the global stage but also reinforces our commitment to service and quality.

Operating globally, we leverage economies of scale to tackle new challenges and adapt seamlessly to the evolving demands of the international market. This strategic positioning allows us to explore new opportunities and forge strong partnerships across borders.

The trust our customers place in us, frequently recommending Wünscher to other companies, consistently validates our efforts. Now, it's your turn to experience the quality and reliability that Wünscher has to offer.

# « TABLE OF CONTENTS

Fuel System Cleaners & Maintenance	.....	Page 2
Engine Cleaners & Maintenance	.....	Page 6
Car Radiator Cleaners & Maintenance	.....	Page 9
Car Body Cleaners & Care	.....	Page 10
Windshield Cleaners & Care	.....	Page 11
Car Cockpit Interior	.....	Page 12
Air Condition Maintenance	.....	Page 14
Wheel Cleaners & Maintenance	.....	Page 15
Lubrication & Protection	.....	Page 17
Adhesive & RTV Adhesive Sealant	.....	Page 19
Undercoat Treatment	.....	Page 21
Motorbike Care & More	.....	Page 22
Advertising & Promotional Products	.....	Page 23

# FUEL SYSTEM CLEAN AND MAINTENANCE



## W-773 MAXCLEAN FUEL SYSTEM CLEANER

Cleans and eliminates deposits in the entire injection system, by the highly effective additives used with unattainable effectiveness. It is a highly effective solution with the task of enabling and maintaining maximum engine power by increasing energy output and creating optimal conditions for fuel combustion. Represents a full alternative to professional cleaning of fuel injection system.

**Application:** Add the product to the tank and fill it up to about 40-60L.

It is recommended to use Maxcleane every 3000Km. Can be used for acute problem solving in case of high fuel consumption or engine malfunction. Suitable for all engine types. Drive the vehicle under normal condition.



Product Vol. 300ml	Barcode 4251798877244
Carton Info. 24pcs-18,5L	UFI E3JV-704M-9004-AHH0

**Danger:** May be fatal if swallowed and enters airways. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Avoid release to the environment. Store locked up. Dispose of container to special waste collection point. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS08



Scan Me



## W-774 OCTANE BOOSTER

Special additive that improves the properties of petrol. Specific combustion modifiers optimize the operation of modern high-tech petrol engines, improve combustion and boost the Octane number. Reduces detonation and starting difficulties, both of which occur when using low-octane or low-quality petrol. It reduces the emission of harmful substances and the toxicity of exhaust emissions. It promotes complete and effective fuel combustion, which indeed reduces fuel consumption.

**Application:** Add the can contents to the tank when refuelling at a ratio of 1:300 (200 ml to 60 L of fuel). Self-mixing.

This product is recommended for engines with four-valve timing systems as well as for turbocharged engines.

Product Vol. 300ml	Barcode 4251798877244
Carton Info. 24pcs-19,1L	UFI E3JV-704M-9004-AHH0

**Danger:** Harmful if inhaled. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Use only outdoors or in a well-ventilated area. Wear protective gloves/eye protection. Store locked up. GHS07 ; GHS08



Scan Me



# FUEL SYSTEM CLEAN AND MAINTENANCE



## W-772 CATALYTIC SYSTEM CLEANER

Professional product of the latest generation with a universal field of application for all gasoline and diesel engine with and without DPF. Oxidizes the carbon deposits with an active, oxygen-rich, polar solvent. Cleans the intake valves, combustion chambers, piston tops, cylinder head, compressor and catalyst effectively and deeply from carbon and soot deposits.

**Application:** Add the can contents in the tank and fill it up to about 45L.

Drive the vehicle under increased loads, in the speed range of > 4000U / M for 15 min. for every drive. Applicable for preventive use as well as for problem solving. It is recommended to use the product at every service interval (10,000 KM) or as a solution in case of high consumption of fuel or engine malfunction.

Product Vol. 300ml  
Barcode 4251798877220  
Carton Info. 24pcs-19,1L  
UFI UKHV-6007-F005-CG0M

**Danger:** May be fatal if swallowed and enters airways. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Avoid release to the environment. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS08



Scan Me

## W-7720 FUEL INJECTION CLEANER

Professional product of the latest generation for all gasoline engines. The injection system is cleaned by the highly effective additives used with unattainable effectiveness. Used regularly, it restores the original state of the fuel system. It eliminates deposits in injectors of all benzene vehicles. Represents a full alternative to professional cleaning of injectors, it regenerates the injection system, as well as the fuel delivery components. Restores the performance of the engine to the original set up parameters.

**Application:** Add to tank before refuel, 300mL of cleaner to 50L of petrol.

Do not refill the tank until all the fuel is used. For very contaminated fuel system, a decrease of power can occur. In this case it is necessary to replace the fuel filter and the cleaning process should be repeated again.

Product Vol. 300ml  
Barcode 4251798877206  
Carton Info. 24pcs-18,5L  
UFI TCNV-F0CP-W00X-FGNF

**Danger:** May be fatal if swallowed and enters airways. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Avoid release to the environment. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS08



Scan Me



## W-7735 DIESELGUARD

The product dissolves condensate water inside the fuel tank and therefore prevents bacteria growth. Prevents corrosion and ensures a clean fuel system. Guarantees a reliable engine starting even after downtimes up to 2 years. Stabilized fuel burns safely and without limitations. Prevents corrosion of the filter, pipes and injectors.

**Application:** Add the can contents to the tank when refuelling at a ratio of 1:300. Self-mixing.

Do not add more than prescribed, this may have an adverse effect.

Suitable for: built-in motors, outboards, cars, campers, motorcycles, snowmobiles, tractor, petrol lawn mower.

Product Vol. 300ml  
Barcode 4251798877350  
Carton Info. 24pcs-18,5L  
UFI 00JV-Q0F6-Y00N-N5WX

**Danger:** Harmful if inhaled. Harmful to aquatic life with long lasting effects. Causes severe skin burns and eye damage. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Contains the active ingredient MBO 500g/L N-96720, >=30 aliphatic hydrocarbons GHS07;GHS08;GHS05



Scan Me

# FUEL SYSTEM CLEAN AND MAINTENANCE



## W-7731 DIESEL CDI SYSTEM CLEANER

Professional and special product that has been developed for all engines with common rail injection and system pump injector. This additive mixture makes it possible to clean, dissolve and effectively protect all types of residues, including rubbers and carbon deposits, from new formation. Effectively combats condensate moisture, emulsifies water particles with the fuel in the fuel tank, eliminates corrosion and wear, keeps the entire system clean. Reduces fuel consumption through efficient cleaning. Restores the performance of the engine to the original setup parameters.

**Application:** Add to tank before fuel, 300ML of cleaner to 50L of diesel.

For prophylactic use it is recommended to use every 15.000Km.

It is suitable for all diesel and turbodiesel engines, with or without particle filter (DPF).

Product Vol. 300ml	Barcode 4251798877312
Carton Info. 24pcs-19L	UFI 7CFV-101W-G009-5KUX

**Danger:** May be fatal if swallowed and enters airways. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Avoid release to the environment. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS08



Scan Me

## W-7730 DIESEL JET CLEANER

Professional product of the latest generation for all diesel engines. The injection system is cleaned by the highly effective additives used with unattainable effectiveness. Used regularly, it restores the original state of the fuel system. It eliminates deposits in injectors of all diesel vehicles. Represents a full alternative to professional cleaning, it regenerates the injection system, as well as the fuel delivery components. Restores the performance of the engine to the original set up parameters.

**Application:** Add to tank before refuel, 300ML of cleaner to 50L of diesel.

Do not refill the tank until all the fuel is used. For very contaminated fuel system, a decrease of power can occur. In this case it is necessary to replace the fuel filter and the cleaning process should be repeated again.



Product Vol. 300ml	Barcode 4251798877305
Carton Info. 24pcs-19L	UFI W8NV-X0P9-M00F-S52D

**Danger:** May be fatal if swallowed and enters airways. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Avoid release to the environment. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS08



Scan Me

## W-7733 DPF REGENERATOR

Professional product developed as replacement for soot filter fluids used by various manufacturers in on-board dosing systems. The DPF Regenerator makes it possible to burn low quality diesel with high sulphur content completely and cleaner at a lower combustion temperature. Soot particles and sulphuric acid will be eliminated before they occur. So not only the particlefilter (DPF) will be protected as well the engine oil will be kept clean and protected from ageing and oxidation in order to carry out the tasks to be performed to the full extent.

**Application:** Add the product to the fuel in the ratio 1:1000 (60ML for 60L).

Repeat application every 2,000 km. As it is an universal product it can be used in most diesel cars with and without onboard dosing system for DPF regeneration.

Ref.: EOLYS DPX 42/176; PSA DPF Fluid C973685; VW G052143A2; FORD 1337646



Product Vol. 60ml	Barcode 4251798877336
Carton Info. 120pcs-13L	UFI SXFV-J0VP-M00R-SYXD


**Danger:** May be fatal if swallowed and enters airways. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Store locked up. Dispose of container to special waste collection point. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS08



Scan Me



# FUEL SYSTEM CLEAN AND MAINTENANCE

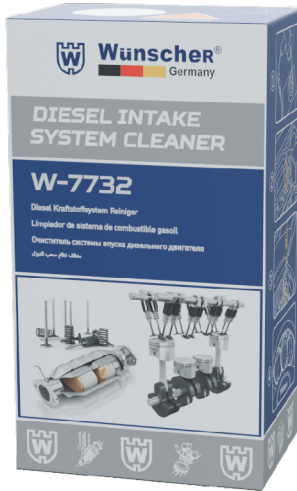

## W-7732 DIESEL INTAKE SYSTEM CLEANER

Removes typical contamination and deposits in the entire air intake, combustion and exhaust system: eliminating soot residues and carbon deposits on the working surface of the Diesel Particle Filter (DPF), combustion chamber, cleans carbon deposits in the ERG valve and turbo charger. It restores the optimal exhaust gases purification and decreases fuel consumption. Helps to clean the oxygen sensor electrodes (lambda probe). It prolongs the service life of the diesel particle filter and the combustion system.

**Application:** To ensure reliable operation and improved performance of all gasoline engines we recommend to use this professional product every 15.000 Km.

Product Vol. 450ml  
Barcode 4251798877329  
Carton Info. 12pcs-17L  
UFI MPFV-10TG-Q008-TY66

**Danger:** May be fatal if swallowed and enters airways. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Store locked up. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS08



Scan Me

## W-7721 CATALYTIC SYSTEM CLEANER

Removes typical contamination and deposits in the entire air intake, combustion and exhaust system: eliminating soot residues and carbon deposits on the working surface of the catalyst Ceramic-core converter, combustion chamber, cleans carbon deposits in the ERG valve and piston ring grooves. It restores the optimal exhaust gases purification and decreases fuel consumption. Helps to clean the oxygen sensor electrodes (lambda probe). It prolongs the service life of the catalytic converter and the combustion system.

**Application:** To ensure reliable operation and improved performance of all gasoline engines we recommend to use this professional treatment every 15.000 Km.

Product Vol. 450ml  
Barcode 4251798877213  
Carton Info. 12pcs-17L  
UFI 9SFV-J0GW-000S-F9S8

**Danger:** May be fatal if swallowed and enters airways. Harmful to aquatic life with long lasting effects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Store locked up. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS08



Scan Me





## W-7711 ENGINE OIL TREATMENT + MOS2

Is a highly effective additive for modern engine oils of gasoline and diesel cars. The introduction of antifriction technology dramatically reduces friction and unnecessary overheating in the engine. The use of molybdenum disulfide MoS2 prevents direct metal-to-metal contact and increases the resistance of engine parts to wear and high temperature corrosion. Prevents the oil film from breaking, ensures favorable friction conditions, reduces fuel consumption and guarantees reliable engine operation under difficult conditions.

**Application:** Shake the can before using! The can content is sufficient for 6L engine oil.

After adding to the engine oil, warm up the engine by running in idle. The addition can be made at any time.

Product Vol. 300ml  
Barcode 4251798877114  
Carton Info. UFI  
24pcs-14,4L RUEV-Y0WH-N00A-5JCJ

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/eye protection. IF IN EYES: Rinse cautiously with water for several minutes. Continue rinsing. If eye irritation persists: Get medical advice/attention. GHS07



Scan Me

## W-7710 MOTOR DOCTOR & STOP SMOKE

Modern, high-performance additive for viscosity stabilization of motor oils. It reduces oil consumption via piston rings and valve guides in petrol and diesel engines. It prevents blue smoke and oil mist and protects the viscosity drop down of the engine oils. Increases the compression and reduces engine noise on hydraulic tappets. It provides extra protection for high wear engines, extends the lifetime of catalytic converters.

**Application:** Shake the can before using! The can content is sufficient for 6L engine oil.

After adding to the engine oil, warm up the engine by running in idle. The addition can be made at any time.

Product Vol. 300ml  
Barcode 4251798877107  
Carton Info. UFI  
24pcs-14,4L 9GMV-D0FQ-V000-U2TT

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/eye protection. IF IN EYES: Rinse cautiously with water for several minutes. Continue rinsing. If eye irritation persists: get medical advice/attention. GHS07



Scan Me



## W-7001 MOTOR POWER STARTER

Designed to start the motor safely at extremely low temperatures, in humid environments, with wet spark plugs and when the battery charge is low. Ensures the start-up of all 2 & 4 stroke gasoline and diesel engines. Consists of a combination of particularly flammable substances.

A proper start protects the engine, starter and battery.

**Application:** Spray directly on the air filter or into air inlet of the air filter for several seconds and start the engine immediately. For gasoline engines accelerate moderately; For diesel engines start without preglowing by accelerating thoroughly.

Product Vol. 450ml  
Barcode 4251798870016  
Carton Info. UFI  
12pcs-11,7L RPMV-D0UH-F00Y-5RYX

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. GHS07 ; GHS02



Scan Me







## W-7714 OIL LEAK STOP

Regenerates rubber and plastic engine seals such as shaft seals and valve stem seals and prevents oil stains under the vehicle. Counteracts oil dilution. Reduces engine noise and oil consumption through piston.

**Application:** The can content is sufficient for up to 6L engine oil.

After adding, run the engine until warm. Sealing firsttakes effect after about 600 - 800 km. To guarantee a lasting effect, renew the treatment each oil service. The product can be add at any time. This product is compatible with any engine oil and suitable for any type of engine.

Product Vol. 300ml | Barcode 4251798877145

Carton Info. 24pcs-13,7L | UFI G0NV-E0M3-P00Y-T4A6

**Danger:** Extremely flammable aerosol. Pressurised container: may burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Protect from sunlight. Do not expose to temperatures exceeding 50 °C. GHS02; GHS07



Scan Me

## W-7042 CARB & INJECTOR CLEANER

Highly-effective multi-purpose solvent combination that removes all kinds of difficult to remove deposits from the inner and outer surface of the carburetor, throttle valves and injection valves without dismantling. Effectively cleans all heavily soiled bare metal surfaces. Neutral towards PA66 plastic. Dissolves most plastics, rubber and car paint. This product is applicable to two- and four-stroke engines without oxygen sensor and catalyst.

**Application:** Remove the air filter. Shake the can. Start the engine at idle speed. Attention! Before starting the engine without a filter, make sure that it is excluded the dust and other contaminants ingress to the carburetor! During cleaning, keep the throttle lever at high engine speed; direct the jet cleaner on valves, walls and channels of the carburetor. Spray cleaner pressing the accelerator pedal periodically, do not allow engine stall at the same time. After cleaning, the engine can start badly and emit strong smoke because of burning sediments. After pressing the accelerator pedal for several time, the engine performance considerably improves.

Product Vol. 400ml | Barcode 4251798870429

Carton Info. 12pcs-11,2L | UFI NYNV-006G-200D-3VQW

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. GHS07 ; GHS02



Scan Me



## W-7044 CARB & INJECTOR CLEANER

Highly-effective multi-purpose solvent combination that removes all kinds of difficult to remove deposits from the inner and outer surface of the carburetor, throttle valves and injection valves without dismantling. Effectively cleans all heavily soiled bare metal surfaces. Neutral towards PA66 plastic. Dissolves most plastics, rubber and car paint. This product is applicable to two- and four-stroke engines without oxygen sensor and catalyst.

**Application:** Remove the air filter. Shake the can. Start the engine at idle speed. Attention! Before starting the engine without a filter, make sure that it is excluded the dust and other contaminants ingress to the carburetor! During cleaning, keep the throttle lever at high engine speed; direct the jet cleaner on valves, walls and channels of the carburetor. Spray cleaner pressing the accelerator pedal periodically, do not allow engine stall at the same time. After cleaning, the engine can start badly and emit strong smoke because of burning sediments. After pressing the accelerator pedal for several time, the engine performance considerably improves.

Product Vol. 650ml | Barcode 4251798870443

Carton Info. 12pcs-16,8L | UFI NYNV-006G-200D-3VQW

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. GHS07 ; GHS02



Scan Me



## W-7045 CARBURETOR TUNE-UP FOAM

High performance multipurpose solvent combination that removes all kinds of difficult-to-remove deposits from the carburetor inner and outersurfaces, throttle valves and injectors without disassembly. Effectively cleans all heavily soiled baremetal surfaces. Neutral towards PA66 plastic. Dissolves most plastics, rubber and car paint. This product is applicable to two- and four-stroke engines without oxygen sensor and catalyst. On older vehicles, a smooth-running carburetor is paramount in maintaining the right fuel-air mixture to keep your vehicle functioning properly. Regular inspection and cleaning is a great way to ensure this.

**Application:** Time between cleanings can vary depending on individual driving habits, but should be done about every time the oil is changed.

Product Vol. 400ml  
Barcode 4251798870450  
Carton Info. 12pcs~11,2L  
UFI NYNV-006G-200D-3VQW

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. GHS07 ; GHS02



Scan Me

## W-7734 DPF FOAM CLEANER

DPF Foam Cleaner is used to remedy reductions in performance and malfunctions caused by clogged diesel particulate filters. Cleaning restores the full flow capacity of the filter. Loosens and removes carbon and ash deposits accumulated in the filter. Secures optimum vehicle handling, engine performance and low fuel consumption. Not flammable. Neutral ash- and metal-free formula. Evaporates without leaving residue behind.

**Application:** The temperature of the particulate filter during cleaning should be less than 40 C. Remove the temperature or pressure sensor. Insert the tube through the opening which has been made and empty in the direction of the particulate filter by using puffs in 5-10 second intervals. Wait approx. 15 minutes to allow the cleaner to take effect. After the sensor has been reinstalled, you or the workshop must initiate DPF regeneration as per the manufacturer's specifications.

Product Vol. 500ml  
Barcode 4251798877343  
Carton Info. 12pcs~13,8L  
UFI 55HV-N0J7-W00P-1S39

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Do no expose to temperatures exceeding 50°C. Contains: <5% anionische Tenside. GHS07



Scan Me



## W-7713 MOTOR FLUSH 10MIN

Special cleaner that removes sediment, soiling, mud and wear products from engine wear. All types of oil-soluble and oil-insoluble residues are brought into suspension and removed during the following oil change. This product is mixable with any synthetic and mineral oil and is suitable for cleaning in any petrol and diesel engine with or without a catalyst and with or without a turbocharger. New oil and filter work more efficiently. Oil maintains its properties during a longer period of time, which leads to extending the engine life as a result.


**Application:** Shake the can before use. The agent is added into the engine oil at engine working temperature. After 10min. of the engine operation at idle, drain the used oil, replace the oil filter and fill new oil. The content of one can is sufficient for an engine oil system with a volume up to 6L. For flushing heavily soiled engine or lubrication system of larger volume it is allowed to use 2 cans. Using a big volume of flush for 4-cylinder engines can damage the seals and gaskets.

Product Vol. 443ml  
Barcode 4251798877138  
Carton Info. 24pcs~19,1L  
UFI 2SNV-Y0TP-F00E-R6JS


**Danger:** May be fatal if swallowed and enters airways. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/eye protection. Get medical advice/attention if you feel unwell. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS07 ; GHS08



Scan Me



# CAR RADIATOR CLEAN AND MAINTENANCE

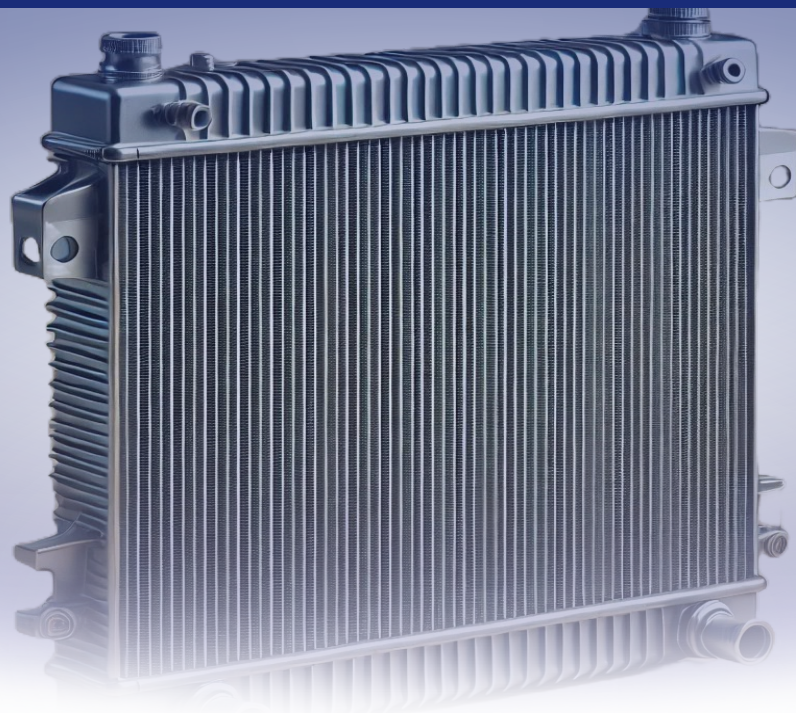

## W-7702 RADIATOR FLUSH

Detergent and converter mixture designed to remove limescale and contaminants in the cooling system. Restores the original cooling performance, ensures smooth operation of thermostat and regulating mechanisms. Reduces engine failure risk, fuel consumption and wear. Compatible with all anti-freezes and coolants. Does not contain any aggressive acids, is neutral towards metal, rubber and plastic.

**Application:** Add contents to the cooling system at environmental temperature. Start up the heater. Then keep the engine running for at least 20-30 minutes. Drain the cleaner and flush out the cooling system with water. Contents will treat up to 12 liters of coolant.



Product Vol. 325ml | Barcode 4251798877022

Carton Info. 24pcs~14,5L | UFI 83NV-X09H-000F-FFW8

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/eye protection. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. GHS05



Scan Me

## W-7701 RADIATOR STOP LEAK + FLUID

Radiator Stop Leak was developed both as a preventive and as an acute problem solution to eliminate leaks in the engine's cooling system. Seals leaks in gaskets, clamps and small cracks in the radiator. Compatible with all anti-freezes and coolants.

**Application:** Shake well before use! Add contents to the cooling system at environmental temperature. Start up the heater. Then drive the vehicle for at least 10 minutes. Contents will treat up to 12 L of coolant.



Product Vol. 325ml | Barcode 4251798877015

Carton Info. 24pcs~14,5L | UFI V6NV-E0YW-900X-4TGA

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Get medical advice/attention if you feel unwell. Dispose of container to special waste collection point. GHS08



Scan Me



## W-7054 INSECT & STICKER REMOVER

Designed to dissolve hard to remove stains on your vehicle's surface. The powerful yet save-to-apply cleaning agent penetrates into stains lifts them off effectively. Dissolves bugs, sticker and bird dropping. Removes tough stains quickly and easily. Ideal for cleaning your vehicle after long road trips. Safe for use on all exterior metal, glass and plastic surfaces - clear coat safe.

**Application:** Rinse excess dirt off. Spray product directly onto the residue, wait for 2 to 3 minutes. Rinse off with clear water.

No scrubbing required! - spray on, let the formula soak and wash away.



Product Vol. 400ml  
Barcode 4251798870542  
Carton Info. 12pcs~11,2L  
UFI 7HJV-R0KK-T00M-M7EA

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Do not expose to temperatures exceeding 50 °C. Contains: >=30 aliphatic hydrocarbons. GHS02



Scan Me

## W-7106 WASH & WAX CAR SHAMPOO



Special car wash concentrate that washes and waxes your vehicle in one easy application. Deep cleaning foam dissolves and lifts off dirt and road grime while soft gel Carnauba Wax helps to protect your vehicle's finish. The formula protects your vehicle's finish against harsh environmental conditions and leaves a brilliant shine!

**Application:** For best results avoid washing the car in direct sunlight. Hose off heavy dirt and debris from the vehicle. Add 30ml of Wash & Wax to an empty bucket and fill up the bucket with a hose. Start at the top of the vehicle and apply soapy water to a portion of the vehicle's surface using a clean wash mitt, sponge or microfiber cloth. Rinse off with clear water. Dry with a chamois or microfiber cloth.

Product Vol. 1000ml  
Barcode 4251798871068  
Carton Info. 10pcs~19L  
UFI REJV-70W6-H003-YVU8

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Avoid breathing vapours/spray. Use only outdoors or in a well-ventilated area. Wear protective gloves/eye protection. Contains: <5% anionic surfactants, Citral, Dipentane. GHS07 ; GHS05



Scan Me



# WINDSHIELD CLEAN & CARE



## W-7103 WINDSHIELD CLEANER 1:100 CONC.

Advanced ready to use winter washer fluid that enhances your driving visibility and safety by streak-free cleaning down to -45°C. Ensures a smooth wiper blade operation and reduces fulguration. Dirt, salt and ice are reliably detached and quickly removed without causing micro-scratches on the glass. This product does not contain phosphates, methanol and is biologically neutral. Comes with a pleasant citrus smell.

**Application:** Fill windshield washer reservoir without diluting product.



Product Vol. 32ml  
Barcode 4251798871037  
Carton Info. 159pcs~15L  
UFI YQKV-U085-300J-V0K7

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/eye protection. If skin irritation or rash occurs: Get medical advice/attention. Contains: >15% anionic surfactants, Limonene, Ethanol. GHS05; GHS07



Scan Me

## W-7102 GLASS ANTI-FOG



Prevents the fogging of the interior to ensure safe and hassle-free driving conditions regardless of the weather conditions. Further removes smoke residues and limestone formation. Fits in glove compartment, door panel or under seat. For use on automotive and marine interior glass and mirrors. Product also works great on bathroom mirrors and tiles. Duration of exposure - up to four weeks.

**Application:** Thoroughly clean the surface with a glass cleaner and wipe dry with a glass microfiber before applying Anti-Fog agent to the inside of a vehicle window. Spray agent on the glass and let it dry. Carefully polish the dried anti-fog agent using microfiber to deep shine. If the glass processing is performed for the first time or after a considerable period of time (over 3 month), it is recommended to repeat the procedure.

Product Vol. 100ml  
Barcode 4251798871020  
Carton Info. 48pcs~14,4L  
UFI XDKV-T0GJ-V00J-7N7Y

**Danger:** Highly flammable liquid and vapour. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Wear protective gloves/eye protection. GHS02; GHS07



Scan Me



## W-7140 COCKPIT CLEANER

Designed to protect the dashboard from cracking and drying out. Returns the original shine to all plastic, vinyl and rubber trim elements. It has excellent cleaning properties and leaves a pleasant fresh smell inside the car. It forms a durable polymer layer of silicone which gives the surface excellent waterproof, antistatic and UV-resistant properties. This product can be used for the care of interior coverings made of synthetic material and plastic.

**Application:** Shake well before use! To ensure an optimal cleaning result apply the product to a dry cloth initially, prior to surface treatment. It is not recommended to spray directly onto the surface.



Product Vol. 650ml  
 Barcode 4251798871402  
 Carton Info. 12pcs-16,8L  
 UFI 7MNV-Y0EV-U00E-EHDN

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Contains: 15-30% aliphatische Kohlenwasserstoffe; Citral. GHS02



Scan Me

## W-7141 COCKPIT CLEANER

Designed to protect the dashboard from cracking and drying out. Returns the original shine to all plastic, vinyl and rubber trim elements. It has excellent cleaning properties and leaves a pleasant fresh smell inside the car. It forms a durable polymer layer of silicone which gives the surface excellent waterproof, antistatic and UV-resistant properties. This product can be used for the care of interior coverings made of synthetic material and plastic.

**Application:** Shake well before use! To ensure an optimal cleaning result apply the product to a dry cloth initially, prior to surface treatment. It is not recommended to spray directly onto the surface.



Product Vol. 400ml  
 Barcode 4251798871419  
 Carton Info. 12pcs-11,2L  
 UFI 7MNV-Y0EV-U00E-EHDN

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Contains: 15-30% aliphatische Kohlenwasserstoffe; Citral. GHS02



Scan Me



## W-7052 SILICONE SPRAY

Mineral-oil free, grease-free release agent, lubricant and protective coating based on silicones dissolved in chlorine-free solvents. It protects, lubricates and insulates all surfaces by means of a transparent, permanent protective film. Restores the elasticity of rubber, preventing freezing doors and trunklid in the winter. Lubricates the rollers and the seat belt.

**Application:** Shake the bottle before use! Apply the spray to the treated surface from a distance of 10-15cm. If necessary, repeat the treatment. Avoid contact with painted surfaces and food.

Product Vol. 450ml | Barcode 4251798870528

Carton Info. 12pcs~11,7L | UFI NQNV-6049-400W-3UYQ

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. GHS02



Scan Me

## W-7111 UPHOLSTERY FOAM CLEANER

Highly effective cleaner that removes various soiling from furniture upholstery, vehicle interiors, carpets, fabric etc. It restores the original look and color of fabric and carpet materials, brings up the pile, removes unpleasant smells and refreshes the air in the vehicle interior. This product prevents re-soiling thanks to its antistatic properties.

**Application:** Shake well before use! Apply foam directly onto the surfaces to be cleaned. Allow to act depending on the degree of contamination (2-5 minutes). Rub in using a brush in order to remove stubborn contaminants. Wipe off residues with a damp sponge (distilled water) or allow to dry and then vacuum. Repeat process in case of heavy soiling.

Product Vol. 650ml | Barcode 4251798871112

Carton Info. 12pcs~16,8L | UFI NHNV-F0RG-H00X-S5TK

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Contains: <5% anionische Tenside, Citral, Dipentane. GHS02



Scan Me





## W-7160 AIRCON FRESH & CLEAN

Special agent with a pleasant smell for effective cleaning and care of leather vehicle interiors, seats, furniture, motorcycle leather and other smooth leather products. It effectively removes external soiling and simultaneously strengthens the leather structure by deeply penetrating active substances. It restores elasticity, prevents deformation, cracking and drying out of the leather surfaces. It forms a waterproof layer that prevents slippery surfaces. It does not contain dyes and is suitable for all colors of leather goods. This product is ideally suitable for vehicles with heated seats and porous leather surfaces. The composition comprises a UV filter that protects from fading in the sun.

**Application:** Apply a small amount of the composition on a dry clean cloth or spray directly on the surface of the leather. Rub the agent into the leather surface with soft circular motions. Polish with a clean dry cloth.



Product Vol. 200ml | Barcode 4251798871600  
 Carton Info. 12pcs-14,4L | UFI GUMV-E07A-200Y-GF52

**Danger:** Flammable aerosol. Pressurised container: May burst if heated. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Wear protective gloves/eye protection. GHS07; GHS02



Scan Me



## W-7161 A/C SYSTEM CLEANER

Highly effective cleaner that removes various soiling from furniture upholstery, vehicle interiors, carpets, fabric etc. It restores the original look and color of fabric and carpet materials, brings up the pile, removes unpleasant smells and refreshes the air in the vehicle interior. This product prevents re-soiling thanks to its antistatic properties.

**Application:** Shake well before use! Apply foam directly onto the surfaces to be cleaned. Allow to act depending on the degree of contamination (2-5 minutes). Rub in using a brush in order to remove stubborn contaminants. Wipe off residues with a damp sponge (distilled water) or allow to dry and then vacuum. Repeat process in case of heavy soiling.

Product Vol. 520ml | Barcode 4251798871617  
 Carton Info. 12pcs-14,1L | UFI PXMV-W0WQ-D00F-4SR4

**Danger:** Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Avoid breathing vapours/spray. Contains the active ingredient Bronopol 1,8g/L N-91800, <5% anionische Tenside, Citral, Dipentane. GHS07



Scan Me





## W-7120 TIREFIX REPAIR SEALANT

Designed for the tool-free emergency repair of tire punctures for all common automobile and caravan tire sizes. It removes reliably and quickly air leaks in pierced tires with a diameter of up to 5mm by creating a durable vulcanized film.

**Application:** Remove the cause of the puncture (e.g. nails, screws) if possible, turn the wheel with the leakage downwards and fully release the air from the wheel.

Shake the can well! Pre-heat the can (vehicle heater system, in your hands) in cold conditions. Connect the hose to the valve. Hold the can as vertical as possible and spray the complete content into the tire. Do not apply in the case of very large holes, the destruction of the tires, or if it slides from the disk.

Drive at a speed of 10-15Km/h right away so that the agent may spread optimally within the tire. Drive at an average speed of up to 70Km/h afterwards. Check the air pressure regularly. Contact a repair shop to have the tire mended professionally. Report at the workshop that a flammable gas is in the tire - service must be carried out in a well-ventilated area, without access of fire.



Product Vol. 450ml	Barcode 4251798871204
Carton Info. 12pcs~11,8L	UFI WFNV-Y023-700E-3U7H

**Danger:** Extremely flammable aerosol. Pressurised container. May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Wear protective gloves/eye protection. IF exposed or concerned: Get medical advice. GHS07 ; GHS09 ; GHS02



Scan Me



## W-7124 TIRESHINE EXCELLENT GLOSS

Tire shine spray for long lasting deep shine, gives tires the wet look without brush and water. Contains an increased amount of active ingredients and polymers that protect the tire for a long time. The rubber is maintained and protected from cracking, premature ageing, UV rays and colour bleaching when used regularly. The deep black glossy look lasts for several weeks.

**Application:** Clean the tire, spray on thinly, let it take effect, finished. Forms a glossy, black protective film on the rubber surface. Suitable for all types of tires.

Product Vol. 650ml	Barcode 4251798871242
Carton Info. 12pcs~16,8L	UFI X3FV-G0YQ-J00T-5K3R

**Danger:** Extremely flammable aerosol. Pressurised container. May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. GHS02



Scan Me



## W-7121 WHEEL CLEANER

Wheel cleaner delivers most powerful cleaning performance being also safe for all wheel and brake finishes! This advanced chemistry blends road grime attacking surfactants with active brake dust dissolving agents. The deep-cleaning foam formula turns brake dust purple and road grime brown as it gently loosens stubborn contaminants. And since it's acid free and pH balanced this wheel cleaner is safe and effective for all wheel finishes and painted brake components.

**Application:** Shake well before use! Spray Wheel Cleaner evenly on the soiled rims. Depending on the degree of soiling allow to act for 5 to 7 min, but do not let dry on the surface. In case of stubborn soiling use sponge or brush during the cleaning process. Thoroughly rinse the soiling and the detergent residues with a strong water jet.

Product Vol. 380ml	Barcode 4251798871211
Carton Info. 12pcs-18L	UFI 74KV-90EC-Y002-8MG5

**Danger:** Harmful if swallowed. May cause an allergic skin reaction. Keep out of reach of children. Avoid breathing vapours/spray. IF ON SKIN: Wash with plenty of water. Contains: <5% anionic surfactants, Citral, Sulforokanol. GHS07



Scan Me

## W-7122 / W-7123 TIRESCHINE FOAM CLEANER

Restores the tires original look without brush and water. Contains an increased amount of active detergents and polymers that protect the rubber long-lasting. Cleans, highlights the dark tire color and protects the tires from aging and cracking. Forms an abundant foam that has high penetrating properties. Easily removes dirt and road dust from the tire. Forms a shiny, black color protective film on the rubber surface

**Application:** Shake can vigorously before use! Spray tire shine thinly and evenly onto the surface and allow to act for a few minutes. Rinse off with water if necessary.

After treatment is over, test brakes at a moderate speed since any silicone film which may have deposited on the brake discs must be removed for the brakes to operate to optimum effect.

Product Vol. 650ml/400ml	Barcode 4251798871228
Carton Info. 12pcs-16,8L 12pcs-11,2L	UFI HRMV-W0HW-S00G-T3K0

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS02



Scan Me



## W-7043 BRAKE & PART CLEANER

Used for cleaning and degreasing small components in the automotive and industrial sector. Brakes, clutches, transmissions and for assembly and repair work. Removes oil and grease stains from floor coverings, fabrics and clothes. Because of its universal properties, Brake and Parts Cleaner has many areas of use in industry, the workshop, agriculture and for hobbies, etc. Evaporates quick and residue free. Neutral towards rubber, nylon and plastic parts. Easy-to-use on difficult to reach places thanks to the 360° valve.

**Application:** Spray onto the contaminated components and allow to drain off and evaporate.

Product Vol. 600ml	Barcode 4251798870436
Carton Info. 12pcs-15,6L	UFI 81PV-G0VV-C00W-R79Y

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS02



Scan Me



## W-7041 QUICK RUST REMOVER

Quick rust remover has excellent anti-frictional properties. It is designed for wide use in all moving assembly mechanisms. Thanks to the quickly penetrating solvents and thin lubricants contained within the composition, it removes rust from threaded connections within seconds. This product does not harm rubber and plastic surfaces.

**Application:** Shake the can before use! Spray quick rust remover on the work piece from a distance of 15-20cm and allow to act for a few minutes. In case of a high corrosion degree, remove dirt and loose rust using rough sandpaper or a metal brush first and spray Quick rust remover in several stages at least every two minutes. For hard to reach places extension pipe is attached.



Product Vol. 450ml | Barcode 4251798870412

Carton Info. 12pcs~11,7L | UFI 54PV-00K8-P00D-EJW1

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS02



Scan Me



## W-7053 WHITE LITHIUM SPRAY GREASE

White lithium grease with a universal field of application in lubrication and excellent low and high temperature properties. The formed soft layer of non-tacky grease adheres tightly to the contact point, reduces the friction of the parts and protects against dirt, water ingress, in winter prevents freezing of parts. Applicable for automotive door locks, trunk locks and bonnets. It is extremely adhesive, provides reliable corrosion protection and is age and squeeze-stable. Guarantees long-term lubrication security.

**Application:** Shake the can well! Spray the grease on the workpieces from a distance of 10-15cm. If necessary, repeat the treatment.

Product Vol. 450ml | Barcode 4251798870535

Carton Info. 12pcs~11,7L | UFI PKMV-W054-500G-GEDV

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. GHS07; GHS09; GHS02



Scan Me



## W-7048 M-40 ANTIRUST MULTILUBRIFICANT

M-40 Antirust Multifunction lubricates, cleans and prevents corrosion on all surfaces as well as on moving parts. It displaces moisture, dissolves rust and soiling, prevents short circuits and leakage currents, protects surfaces against corrosion and ensures smooth running of moving parts. It is neutral towards rubber, plastic, varnish and metal surfaces.

**Application:** Before processing clean surface from dirt and loose rust mechanically. Spray lubricant onto the surface from a distance of 10-20 cm and allow to act.

Recommended for use at service stations, industry, automobiles and household.

Product Vol. 200ml /400ml / 450ml  
 Barcode 4251798870481  
 UFI 17PV-H08N-Y00V-2WG3  
 Carton Info. 12pcs-7,2L  
 12pcs-12L  
 12pcs-11,7L

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. GHS02





# ADHESIVE AND RTV ADHESIVE SEALANT



## W-7090 EPOXY STEEL WELDING 3 TON

2K Epoxy glue for metal - is designed for quick and reliable structural bonding of steel, aluminium, brass, copper, iron, tin, lead and various alloys within 5 minutes.

Excellent water resistance. The product develops high strength on a variety of materials and is water resistant. This adhesive is a general purpose adhesive that is ideal for many DIY applications. Due to its medium viscosity and fast fixing at room temperature it is easy to apply.

Product Vol. 30g	Barcode 4251798870900
Carton Info. 144pcs-77,8L	UFI F2DM-N01Q-N00Q-WG6V

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/eye protection. IF ON SKIN: Wash with plenty of water. IF IN EYES: Rinse cautiously with water for several minutes. Continue rinsing. GHS02 ; GHS07



Scan Me



## W-7091 EPOXY PLASTIC BONDER

2K Epoxy Plastic Bonder - is a two-component adhesive, suitable for professional use due to its quick fastening and mechanical resistance when bonding of all types of plastic parts (PVC, ABS/PC, PET and Acrylic): bumpers, headlights, rear lights, radiator, brackets, spoilers etc.

The product develops high strength on a variety of materials and is water resistant. This adhesive is a general purpose adhesive that is ideal for many DIY applications. Due to its medium viscosity and fast fixing at room temperature it is easy to apply.

Product Vol. 30g	Barcode 4251798870917
Carton Info. 144pcs-77,8L	UFI F2DM-N01Q-N00Q-WG6V

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Avoid breathing vapours/spray. Wear protective gloves/eye protection. IF ON SKIN: Wash with plenty of water. IF IN EYES: Rinse cautiously with water for several minutes. GHS02 ; GHS07



Scan Me

# ADHESIVE AND RTV ADHESIVE SEALANT



## W-7071 RTV SILICONE BLACK

Neutral curing RTV silicone sealant to replace or reinforce seals.

Does not cause corrosion on metal surfaces, electrical circuits or sensors. Excellent resistance to vibration and shock. Outstanding resistance to constant contact with hot oils. High-temperature resistant up to 270 C° (short term).

Covers and seals gaps of up to 6 mm. Skin formation time 15 min, curing time 3mm / 24 hour.

Product Vol. 100g  
Barcode 4251798870719  
Carton Info. 144pcs-72L  
UFI XJGV-300F-S007-ED0U

**Danger:** Use only outdoors or in a well-ventilated area.



Scan Me

## W-7072 RTV SILICONE GREY

Neutral curing RTV silicone sealant to replace or reinforce seals.

Does not cause corrosion on metal surfaces, electrical circuits or sensors. Excellent resistance to vibration and shock. Outstanding resistance to constant contact with hot oils. High-temperature resistant up to 270 C° (short term).

Covers and seals gaps of up to 6 mm. Skin formation time 15 min, curing time 3mm / 24 hour.

Product Vol. 100g  
Barcode 4251798870726  
Carton Info. 144pcs-72L  
UFI XJGV-300F-S007-ED0U

**Danger:** Use only outdoors or in a well-ventilated area.



Scan Me



## W-7092 EPOXY PUTTY QUICK STEEL

Epoxy Putty is a 2K-putty sealant based on epoxy resin, reinforced with metal particles for quick and long-lasting repairs. Easily mixed by hand and takes any shape. Designed to repair surfaces made of any material. It can be used to eliminate leaks in the gas tank, radiator, oil pan, barrels, pipes and restore worn threads. Resistant to oils, solvents and other chemicals.


Applicable under water. Retains its properties up to short term 260C°. Processing time is 15 minutes. Solid in 30 min. Complete curing in 24h.

Product Vol. 56g  
Barcode 4251798870924  
Carton Info. 144pcs-18,3L  
UFI R8DM-N0EH-800Q-75D0

**Danger:** If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/eye protection. IF ON SKIN: Wash with plenty of water. GHS07



Scan Me



# UNDERCOAT TREATMENT >>>



## W-7055 / W-7056 UNDERBODY ANTICOR

Underbody Anticor is a bitumen-based coating material used as corrosion inhibitor to preserve the underbody, the wheel arches as well as the longitudinal beams, at the same time extending their working life. Recommended for repairs and sealing of exposed areas. It forms a durable and elastic black layer that protects from crushed gravel and split. It has an excellent resistance to moisture, salts, and varying temperatures. Additionally, it forms a noise-resistant and anti-vibration layer. It is applicable to iron, lacquer, anti-corrosives and hard plastics. This product forms a durable, smooth, fast-drying and indelible coating.

**Application:** Ideal temperature for spraying is 20 C°. Shake aerosol well for about 2 min before use! Thoroughly clean the area to be painted, remove rust, grease, etc. Hold the can in an upright position and apply a thin coat from a distance of 40 cm in a steady motion. Wipe soiled areas immediately. Apply 2 - 3 individual coats at intervals of at least 3 minutes. After finishing the paintwork, clean the nebulizer by turning the can upside down and pressing the atomizer for a few seconds. Dries completely within 24 hours.


Product Vol. 650ml/1000ml | Barcode 4251798870559

Carton Info. 12pcs-16,8L | UFI 0EMV-V0SA-J00G-5R7R  
12pcs- 14,5L

**Danger:** Flammable liquid and vapour. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Use only outdoors or in a well-ventilated area. GHS02 ; GHS07



Scan Me



## W-7201 MOTORBIKE ENGINE FLUSH

Special cleaner that removes sediment, soiling, mud and wear products from engine wear. All types of oil-soluble and oil-insoluble residues are brought into suspension and removed during the following oil change. This product is mixable with any synthetic and mineral oil and is suitable for cleaning in any petrol engine with or without a catalyst.

**Application:** Add to the old engine oil under operating temperature. Let the engine run for 10 minutes in the idle mode. Afterwards drain the old engine oil.

Sufficient for washing an engine oil systems with a volume up to 2 L



Product Vol. 100ml	Barcode 4251798872010
Carton Info. 120pcs-36L	UFI M8FV-H0CH-500T-G88V

**Danger:** May be fatal if swallowed and enters airways. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Wear protective gloves/eye protection. Get medical advice/attention if you feel unwell. Contains: >=30 aliphatische Kohlenwasserstoffe. GHS07 ; GHS08



Scan Me

## W-7200 CHAIN LUBE EXTREME

Blue fully synthetic high temperature grease, reinforced by CeraMol technology, shows excellent low and high temperature properties, for automotive and motorcycle, fast-moving chains. The formed soft layer of non-tacky grease adheres tightly to the contact point, reduces the friction of the parts and protects against dirt, water ingress, in winter prevents freezing of chain link. It is extremely adhesive, provides reliable corrosion protection and is age and squeeze-stable. Guarantees long-term lubrication and protection. For all standard chains and chains with O-RING, X-RING and Z-RING for motorcycles, go-karts and industrial power drives.



Product Vol. 200ml	Barcode 4251798872003
Carton Info. 24pcs-14,4L	UFI 71GV-20K2-X008-FAHF

**Danger:** Extremely flammable aerosol. Pressurised container: May burst if heated. Keep out of reach of children. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. Avoid breathing vapours/spray. Use only outdoors or in a well-ventilated area. GHS07 ; GHS09 ; GHS02



Scan Me



# ADVERTISING AND PROMOTIONAL PRODUCTS



Scan Me



Z6011 Polo



Z6040 Shelf



Z6010 Cap



Z6023 Pen



Z6041 Display








[www.wunscher.de](http://www.wunscher.de)

**WÜNSCHER**  
Fahrzeugteile GmbH  
Behrensallee 6 Pinneberg, Germany  
[info@wunscher.de](mailto:info@wunscher.de)  
☎ +49 (0)40/ 228 690-77

STAMP DEALER :



Article SKU: Z6040